SPECIFICATION SHEET

CEILING FAN WITH LED LIGHT MIRFAK / 54 INCH

Item Number 72958






Remote Control Use x2 AAA 1.5V Batteries (Not Included)



Energy Saver





Timer



Speeds



LED BUILD IN



3000K - 4000K 6500K









Specifications

Size	54"
Fan Finish	White
Motor Material	Magnetic tile, copper, Silicon steel, steel
Motor Size	153 mm x 15 mm
Blades Material	3 / Plastic
Blades Color	White
Blade Pitch	16° -60°
Approved Location	Indoor
Suggested Room Size	Large Room (up to 15 x 15)
Down Rod	1" x 6"/19.6"
Installation	Down Rod
Light Bulb Usage	LED Buit In 18 W Max.
Lamp Shade Finish	Plactic and Aluminum / Milky
Color Temperature	3000K - 4000K - 6500K
Control	Remote Control / Use x2 AAA 1.5V Batteries (Not Included)
Speed	6
Reverse Flow	Yes
Capacitor	N/A

Energy Information

Power	40 W / 85-277 V~ 50/60 Hz
Airflow (CFM)	4,682
Airflow Efficency (CFM/W)	117
RPM	60 - 145
Amp	0.31 A
Barcode	7453089417246

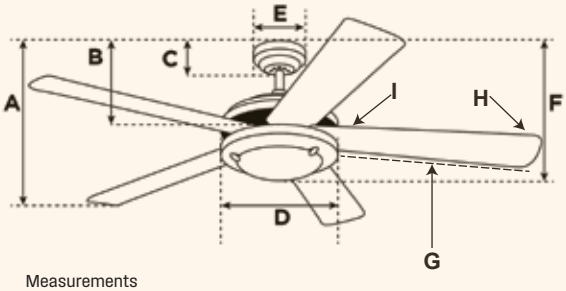

Measurements

A. Top of Canopy to Bottom of Blades	12.8 "
B. Top of Canopy to Bottom of Switch House	12.8 "
C. Top of Canopy to Bottom of Canopy	2.4 "
D. Width of Motor Housing	6.1 "
E. Width of Canopy	5.9 "
F. Top of Canopy to Bottom of Glass	15.3 "
G. Length of Blades	27.5"
H. Width at the beginning of the blade	4.3"
I. Width at the end of the blade	6.5 "

and WESTINGHOUSE are registered trademarks of Westinghouse Electric Corporation. Used under license by Westinghouse Lighting. All Rights Reserved.
A Licensee of Westinghouse Electric Corporation.
Specifications are subject to change without notice. Please visit www.westinghouselightinglatinamerica.com for latest information.

HOJA DE ESPECIFICACIONES

VENTILADOR DE TECHO CON LUZ LED MIRFAK / 137 cm

Numero de Artículo 72958







Control Remoto Utiliza x2 Baterías AAA 1.5V (No Incluidas)

Ahorrador de Energía

Temporizador

Velocidad

LED INTEGRADO

3000K - 4000K 6500K

Especificaciones

Tamaño	132 cm
Acabado del Ventilador	Blanco
Material del Motor	Baldosa Magnética, Cobre, Acero al Silicio, Acero.
Tamaño de Motor	152 mmx 12 mm
Material de Aspas	3 / Plástico
Color de Aspas	Blanco
Grado de Aspas	16° - 60°
Lugar Aprobado	Interior
Tamaño de Habitación sugerido	Habitación Mediana (hasta 15 x 15)
Varilla Vertical	1" x 6"/19.6"
Instalación	Varilla Vertical
Bombillas	LED Integrado 18 Watts Máximo
Material de Pantalla de Lámpara	Plástico y Aluminio / Lechoso
Ambiance Switch	3000K - 4000K - 6500K
Control	Control Remoto / Utiliza x2 Baterías AAA 1.5V (No Incluidas)
Velocidad	6
Flujo Inverso	Si
Capacitador	N/A

Información Energética

Poder	40 W / 85-277 V~ 50/60 Hz
Flujo de Aire (CFM)	4,682
Eficiencia Flujo de Aire (CFM/W)	117
RPM	60 - 145
Amperio	0.31 A
Código de Barra	7453089417246

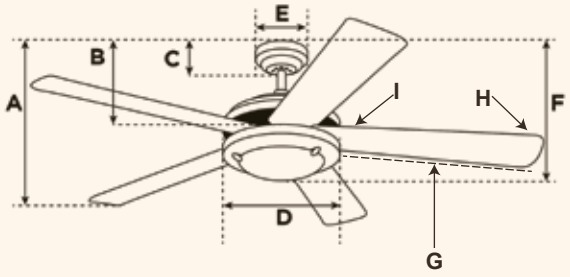

Medidas

A. De la parte superior del dosel a la parte inferior de las aspas	32.5 cm
B. De la parte superior del dosel a la parte inferior al interruptor	32.5 cm
C. De la parte superior del dosel a la parte inferior del dosel	6 cm
D. Ancho de la carcacha del motor	15.5 cm
E. Ancho del dosel	15 cm
F. Parte superior del dosel a la parte inferior al vidrio	39 cm
G. Longitud de las Aspas	70 cm
H. Ancho al comienzo de las Aspas	11 cm
I. Ancho al final de las Aspas	16.5 cm

y WESTINGHOUSE son una marca registrada por Westinghouse Electric Corporation. Usado bajo licencia Westinghouse Lighting. Todos los derechos reservados.
Una licencia de Westinghouse Electric Corporation.
Las especificaciones están sujetas a cambios sin previo aviso. Por favor visite www.westinghouselightinglatinamerica.com para la información más reciente.