

SPECIFICATION SHEET

APUS - DC Ceiling Fan with LED Light / 52" Model 79091



Remote Control
Use x2 AAA 1.5V
Batteries
(Not Included)



2700K a 6500K



LED
BUILT IN



ABS Blades



Dimmable
LED



Speeds



Multivoltage



Timer



Energy Saver




Specifications

Type	Ceiling
Fan Finish.....	Black
Motor Material.....	Copper, Iron, Silicon Steel
Blades	5 Matte Black ABS Blades
Blade Pitch.....	12°
Approved Location	Indoor
Suggested Space Size	Up to 20' x 20'
Down Rod Measurements	1.04" x 5"
Installation	Downrod Mounted
Lighting Set	LED Built In 24 W
Light Kit Glass	Acrylic
Color Temperature	2700 K - 6500 K
Timer	Yes (2h-4h-8h)
Control	Remote Control (Use x2 AAA 1.5V Batteries not Included)
Speeds	6
Reversible Airflow	Yes
Capacitor	

Energy Information

Power	40 W / 110-240 V~ 50/60 Hz
Airflow (CFM).....	7,500
Airflow Efficiency (CFM/W)	187.5
RPM	80 / 180
Amp	0.07 / 0.13 / 0.2

Master Box	1
Barcode.....	7453089422615

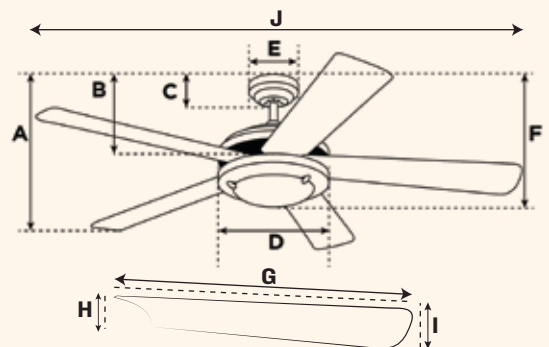

Measurements

A. Top of Canopy to Bottom of Blades	10.6"
B. Top of Canopy to Bottom of Switch House.....	11.0"
C. Top of Canopy to Bottom of Canopy	2.4"
D. Width of Motor Housing	11.4"
E. Width of Canopy	5.9"
F. Top of Canopy to Bottom of Glass	13"
G. Length of Blades.....	22.6"
H. Width at beginning of the blade.....	6.7"
I. Width at the end of the blade	4.8"
J. Total fan width.....	52"



 and WESTINGHOUSE are registered trademarks of Westinghouse Electric Corporation. Used under license by Westinghouse Lighting. All Rights Reserved.
A Licensee of Westinghouse Electric Corporation.
Specifications are subject to change without notice. Please visit www.westinghouselightinglatinamerica.com for latest information.

HOJA DE ESPECIFICACIONES

APUS - Ventilador DC de Techo con Luz LED / 132 cm Modelo 79091



Control Remoto
Utiliza Baterías
2x AAA1.5V
(Not Included)



2700K a 6500K



24
Watts
LED
INTEGRADO



Aspas de ABS



-



Velocidades



Temporizador



Ahorrador de Energía



MOTOR


Especificaciones

Tipo	Techo
Acabado del Ventilador	Negro
Material del Motor	Cobre, Hierro, Acero al Silicio
Aspas	5 Aspas ABS, color Negro Mate
Grado de Aspas	12°
Lugar Aprobado	Interior
Tamaño Sugerido del Espacio	Hasta 20' x 20'
Medida de Varilla Vertical	2.65 x 12.5 cm
Instalación	Montado en Varilla
Juego de Iluminación	LED Integrado de 24 W
Kit de pantalla de Lámpara	Acrílico
Temperatura de Color	2700 K - 6500 K
Temporizador	Si (2h-4h-8h)
Control	Control Remoto (Utiliza x2 Baterías AAA 1.5V No Incluidas)
Velocidades	6
Flujo de Aire Inverso	Si
Capacitor	

Información Energética

Potencia	40 W / 110-240 V ~ 50/60 Hz
Flujo de aire (CFM)	7,500
Eficiencia de Flujo de Aire (CFM/W)	187.5
RPM	80 / 180
Amperio	0.07 / 0.13 / 0.2

Caja Maestra	1
Código de Barra	7453089422615

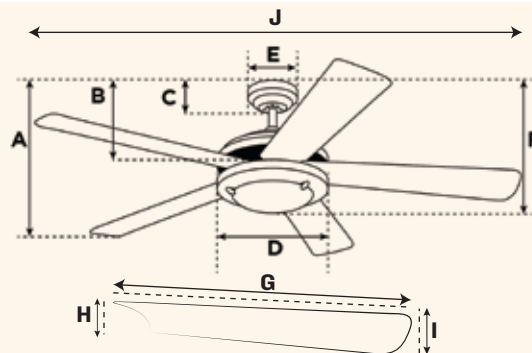

Medidas

A. De la parte superior del dosel a la parte inferior de las aspas.	27 cm
B. De la parte superior del dosel a la parte inferior al interruptor	28 cm
C. De la parte superior del dosel a la parte inferior del dosel	6 cm
D. Ancho de la carcacha del motor	29 cm
E. Ancho del dosel	15 cm
F. Parte superior del dosel a la parte inferior al vidrio	33.1 cm
G. Longitud de las aspas	57.5 cm
H. Ancho al inicio del aspa	16.9 cm
I. Ancho final del aspa	12.3 cm
J. Ancho total del ventilador	132 cm



WESTINGHOUSE son una marca registrada por Westinghouse Electric Corporation. Usado bajo licencia Westinghouse Lighting. Todos los derechos reservados.
Una licencia de Westinghouse Electric Corporation.
Las especificaciones están sujetas a cambios sin previo aviso. Por favor visite www.westinghouselightinglatinamerica.com para la información más reciente.